
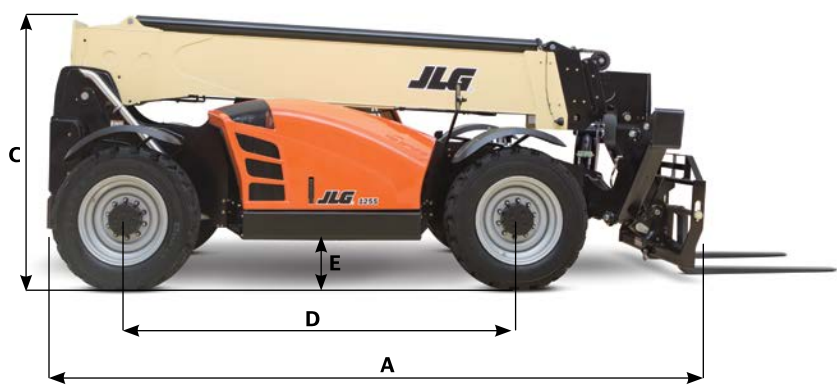


	<b>G5-18A</b>	<b>742</b>	<b>943</b>	<b>1043</b>	<b>1055</b>	<b>1255</b>
Rated Capacity @ 24 in. (610 mm) Load Center	5,500 lb (2,495 kg)	7,000 lb (3,175 kg)	9,000 lb (4,082 kg)	10,000 lb (4,536 kg)	10,000 lb (4,536 kg)	12,000 lb (5,443 kg)
Maximum Lift Height	18 ft 4 in. (5.49 m)	42 ft (12.8 m)	43 ft (13.1 m)	43 ft (13.1 m)	55 ft (16.76 m)	55 ft (16.76 m)
Capacity @ Maximum Lift Height	4,400 lb (1,996 kg)	6,000 lb (2,721 kg)	7,000 lb (3,175 kg)	7,000 lb (3,175 kg)	*5,000 lb (2,268 kg)	*5,000 lb (2,268 kg)
Maximum Reach	10 ft 11 in. (3.33 m)	29 ft 1 in. (8.86 m)	30 ft 5 in. (9.27 m)	30 ft 5 in. (9.27 m)	42 ft (12.8 m)	42 ft (12.8 m)
Capacity @ Maximum Reach	1,850 lb (839 kg)	1,000 lb (454 kg)	1,200 lb (544 kg)	*2,700 lb (1,225 kg)	*3,000 lb (1,361 kg)	*3,500 lb (1,588 kg)
Approximate Operating Weight	11,000 lb (4,990 kg)	21,347 lb (9,695 kg)	24,912 lb (11,300 kg)	26,235 lb (11,900 kg)	31,559 lb (14,315 kg)	33,960 lb (15,404 kg)
A. Length (Less Forks)	150.4 in. (3.80 m)	227 in. (5.76 m)	237 in. (6.02 m)	237 in. (6.02 m)	240.8 in. (6.12 m)	240.8 in. (6.12 m)
B. Width	71.5 in. (1.82 m)	97 in. (2.46 m)	97 in. (2.46 m)	97 in. (2.46 m)	100.75 in. (2.56 m)	100.75 in. (2.56 m)
C. Height	75.6 in. (1.92 m)	96 in. (2.43 m)	98 in. (2.48 m)	100 in. (2.54 m)	100 in. (2.54 m)	100 in. (2.54 m)
D. Wheelbase	90 in. (2.29 m)	135 in. (3.42 m)	135 in. (3.42 m)	135 in. (3.42 m)	137.5 in. (3.49 m)	137.5 in. (3.49 m)
E. Ground Clearance	10.8 in. (274 mm)	17 in. (432 mm)	17 in. (432 mm)	17 in. (432 mm)	18 in. (457 mm)	18 in. (457 mm)
Outside Turning Radius	127.0 in. (3.20 m)	12 ft (3.66 m)	12 ft (3.66 m)	12 ft (3.66 m)	14 ft (4.3 m)	14 ft (4.3 m)
Drive	4 x 4	4 x 4	4 x 4	4 x 4	4 x 4	4 x 4
Engine	Deutz TD 2.9 L4	Cummins QSF3.8L	Cummins QSF3.8L	Cummins QSF3.8L	Cummins QSF3.8L	Cummins QSF3.8L
HP @ RPM	74 hp @ 1,800 rpm	74 hp @ 2,500 rpm	110 hp @ 2,400 rpm	110 hp @ 2,400 rpm	130 hp @ 2,500 rpm	130 hp @ 2,500 rpm
Transmission	Hydrostatic	Powershift	Powershift	Powershift	Powershift	Powershift
Steering	All-Wheel	All-Wheel	All-Wheel	All-Wheel	All-Wheel	All-Wheel
Tires	12 x 16.5	370/75-28	370/75-28	400/75-28	400/75-28	400/75-28
Maximum Travel Speed	15 mph (25 kmph)	21 mph (33 kmph)	19 mph (31 kmph)	19 mph (31 kmph)	20 mph (32 kmph)	20 mph (32 kmph)
Frame Tilt Left/Right	—	±10 Degrees	±10 Degrees	±10 Degrees	±10 Degrees	±10 Degrees

\*Outriggers are required to achieve stated capacity.

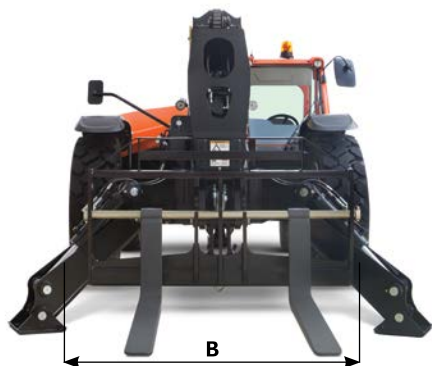

For complete specifications, visit [www.jlg.com](http://www.jlg.com)

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification. These machines meet or exceed ANSI/ITSDF B56.6-2005 as originally manufactured for intended applications.